


## Datenblatt

### Ringschraubstutzen zöllig mit BSP 60° Außengewinde

#### Abmessungen

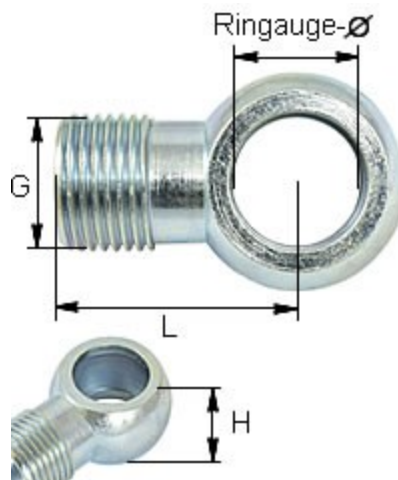

| Artikelnummer | Betriebsdruck | Ringauge-Ø    | Gewinde G | Länge L | Höhe H |
|---------------|---------------|---------------|-----------|---------|--------|
| BSP-RS04-1/4" | 250 bar       | 1/4" (13,3mm) | G1/4A"    | 25mm    | 14mm   |
| BSP-RS04-3/8" | 280 bar       | 3/8" (16,8mm) | G1/4A"    | 28mm    | 18mm   |
| BSP-RS06-1/2" | 250 bar       | 1/2" (21,0mm) | G3/8A"    | 30mm    | 22mm   |
| BSP-RS06-3/8" | 250 bar       | 3/8" (16,8mm) | G3/8A"    | 28mm    | 18mm   |
| BSP-RS08-1/2" | 250 bar       | 1/2" (21,0mm) | G1/2A"    | 33mm    | 22mm   |
| BSP-RS08-3/4" | 210 bar       | 3/4" (26,4mm) | G1/2A"    | 45mm    | 30mm   |
| BSP-RS12-3/4" | 210 bar       | 3/4" (26,4mm) | G3/4A"    | 33mm    | 30mm   |

#### Merkmale

- Werkstoff: Stahl
- Oberflächenschutz: verzinkt